

® = registered Trademark of BASF SE

Irganox[®] 1098

Phenolic primary antioxidant for processing and long-term thermal stabilization

Characterization

Irganox 1098, a sterically hindered phenolic antioxidant, is an efficient, non-discoloring stabilizer for organic substrates such as plastics, synthetic fibers, adhesives, and elastomers, and is particularly effective in polyamide polymers and fibers.


Chemical name

N,N'-hexane-1,6-diylbis(3-(3,5-di-tert.-butyl-4-hydroxyphenyl)propionamide))

CAS number

23128-74-7

Chemical formula

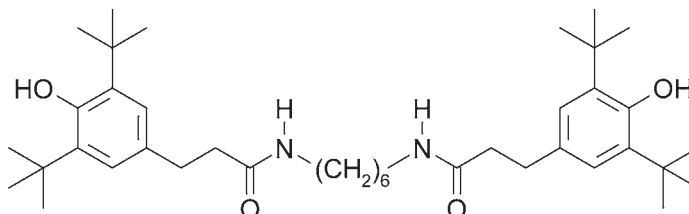

Molecular weight

637 g/mol

Applications

Irganox 1098 is especially suited for the stabilization of polyamide molded parts, fibers, and films. Its use is also recommended in other polymers such as polyacetals, polyesters, polyurethanes, adhesives, elastomers as well as other organic substrates.

Features/benefits

Irganox 1098 provides excellent processing and long-term thermal stability as well as excellent initial resin color. The product is superior to copper-based systems used as stabilizers for polyamides with respect to color and resistance to extraction. It has excellent compatibility with polyamides and other substrates and low volatility.

Product forms

Irganox 1098	white to off-white powder
Irganox 1098 ED	white to off-white granules

Guidelines for use

Irganox 1098 is recommended for use in polyamide molded articles, fibers, and films at concentrations of 0.05 % – 1.0 % depending on the polymer type, method of incorporation, application, and degree of stability required. It is easily dispersed into the polymer by conventional extrusion compounding techniques.

The product may be incorporated during the polyamide polymerization at concentrations of 0.05 % – 0.2 % to provide protection of polymer color properties in subsequent fabrication, spinning, or finishing operations. When Irganox 1098 is incorporated prior to or during the polyamide polymerization, reaction conditions and chain terminator concentration may require adjustment to compensate for the presence of the antioxidant.

Suggested use concentrations for Irganox 1098 in polyacetals, polyesters, polyurethanes, saturated and unsaturated rubbers range from 0.05 % – 0.5 % depending on the substrate and the stability required.

The product can be used in combination with other additives, such as costabilizers (e. g. phosphites, thioethers, hydroxylamines), light stabilizers (e. g. UV absorbers, hindered amines), and other functional stabilizers. The effectiveness of blends of Irganox 1098 with Irgafos 168 (Irganox B 1171) is particularly noteworthy. Performance data for Irganox 1098 alone and in combination with other additives are available in a variety of substrates.

Physical properties

Melting range	156 – 161 °C
Flashpoint	282 °C
Vapor pressure (20 °C)	1.3 E-12 Pa
Specific gravity (20 °C)	1.04 g/ml

Solubility (20 °C)	g/100 g solution
Acetone	2
Benzene	0.01
80 % Caprolactam + 20 % Water	3
Chloroform	6
Ethyl acetate	1
Hexane	0.01
Methanol	6
Water	0.01

Solubility (90 °C)	g/100 g solution
Caprolactam	> 2
95 % Caprolactam + 5 % Water	> 20

Volatility (TGA, air at 20 °C/min)	
Temperature at 1 % weight loss	280 °C
Temperature at 10 % weight loss	340 °C

Health & Safety

Irganox 1098 exhibits a very low order of oral toxicity and does not present any abnormal problems in its handling or general use.

Detailed information on handling and any precautions to be observed in the use of the product(s) described in this leaflet can be found in our relevant health and safety information sheet.

Note

The descriptions, designs, data and information contained herein are presented in good faith, and are based on BASF's current knowledge and experience. They are provided for guidance only, and do not constitute the agreed contractual quality of the product or a part of BASF's terms and conditions of sale. Because many factors may affect processing or application/use of the product, BASF recommends that the reader carry out its own investigations and tests to determine the suitability of a product for its particular purpose prior to use. It is the responsibility of the recipient of product to ensure that any proprietary rights and existing laws and legislation are observed. No warranties of any kind, either expressed or implied, including, but not limited to, warranties of merchantability or fitness for a particular purpose, are made regarding products described or designs, data or information set forth herein, or that the products, descriptions, designs, data or information may be used without infringing the intellectual property rights of others. Any descriptions, designs, data and information given in this publication may change without prior information. The descriptions, designs, data and information furnished by BASF hereunder are given gratis and BASF assumes no obligation or liability for the descriptions, designs, data or information given or results obtained, all such being given and accepted at the reader's risk.

September 2010

BASF Schweiz AG
Plastic Additives
4057 Basel, Switzerland
www.performancechemicals.basf.com