

® = registered Trademark of BASF SE

Irgastab® FS 410

Non-Phenolic Processing Stabilizer System

Characterization

Irgastab FS 410 is a system composed of a high molecular weight hydroxylamine Irgastab FS 042 and a high molecular weight hindered amine BASF Chimassorb® 944 in a 1 : 1 ratio. The system shows excellent compatibility, high resistance to extraction and low volatility.



Chemical name

Irgastab FS 042 Oxidized bis(hydrogenated tallow alkyl) amines
Chimassorb 944 Poly[[6-[(1,1,3,3-tetramethylbutyl)amino]-1,3,5-triazine-2,4-diyl][(2,2,6,6-tetramethyl-4-piperidiny)imino]-1,6-hexanediy]l[(2,2,6,6-tetramethyl-4-piperidiny)imino]]

CAS number

Preparation

Chemical formula

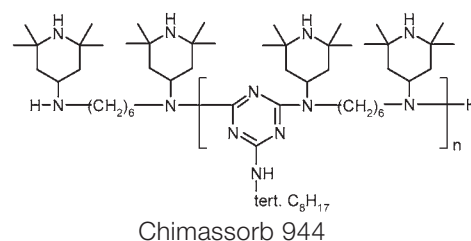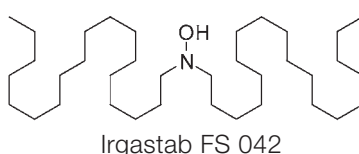

Molecular weight

Irgastab FS 042 538 g/mol
Chimassorb 944 $M_n = 2000 - 3100$ g/mol

Applications

Irgastab FS 410 is used as a processing stabilizer in polyolefin applications where low color and low gas fade discoloration are required.

Features/benefits

Irgastab FS 410 provides outstanding processing stability to polyolefins while virtually eliminating any gas fade discoloration that may occur when phenolic systems are used. The system also provides both long-term thermal stability as well as a higher level of light stability than would be seen with phenolic processing stabilizer systems. Furthermore Irgastab FS systems also enhance the ability of hindered amines to act as light stabilizers.

Product forms

Irgastab FS 410 FF white to off-white, free-flowing granules

Guidelines for use

Irgastab FS systems are effective as processing stabilizers when used at 0.075 %–0.1 %. They are generally effective at 50 % to 60 % the concentration of the previously used processing stabilizer.

Health & Safety

Irgastab FS 410 exhibits a very low order of oral toxicity and does not present any abnormal problems in its handling or general use.

Detailed information on handling and any precautions to be observed in the use of the product(s) described in this leaflet can be found in our relevant health and safety information sheet.

Note

The descriptions, designs, data and information contained herein are presented in good faith, and are based on BASF's current knowledge and experience. They are provided for guidance only, and do not constitute the agreed contractual quality of the product or a part of BASF's terms and conditions of sale. Because many factors may affect processing or application/use of the product, BASF recommends that the reader carry out its own investigations and tests to determine the suitability of a product for its particular purpose prior to use. It is the responsibility of the recipient of product to ensure that any proprietary rights and existing laws and legislation are observed. No warranties of any kind, either expressed or implied, including, but not limited to, warranties of merchantability or fitness for a particular purpose, are made regarding products described or designs, data or information set forth herein, or that the products, descriptions, designs, data or information may be used without infringing the intellectual property rights of others. Any descriptions, designs, data and information given in this publication may change without prior information. The descriptions, designs, data and information furnished by BASF hereunder are given gratis and BASF assumes no obligation or liability for the descriptions, designs, data or information given or results obtained, all such being given and accepted at the reader's risk.

September 2010

BASF Schweiz AG
Plastic Additives
4057 Basel, Switzerland
www.performancechemicals.basf.com